

# ***742A Series***

***RESISTANCE STANDARDS***

## **Instruction Manual**

---

## **WARRANTY**

John Fluke Mfg. Co., Inc. (Fluke) warrants this instrument to be free from defects in material and workmanship under normal use and service for a period of 1 year from date of shipment. Software is warranted to operate in accordance with its programmed instructions on appropriate Fluke instruments. It is not warranted to be error free. This warranty extends only to the original purchaser and shall not apply to fuses, computer media, batteries or any instrument which, in Fluke's sole opinion, has been subject to misuse, alteration, abuse or abnormal conditions of operation or handling.

Fluke's obligation under this warranty is limited to repair or replacement of an instrument which is returned to an authorized service center within the warranty period and is determined, upon examination by Fluke, to be defective. If Fluke determines that the defect or malfunction has been caused by misuse, alteration, abuse, or abnormal conditions of operation or handling, Fluke will repair the instrument and bill the purchaser for the reasonable cost of repair. If the instrument is not covered by this warranty, Fluke will, if requested by purchaser, submit an estimate of the repair costs before work is started.

To obtain repair service under this warranty purchaser must forward the instrument, (transportation prepaid) and a description of the malfunction to the nearest Fluke Service Center. The instrument shall be repaired at the Service Center or at the factory, at Fluke's option, and returned to purchaser, transportation prepaid. FLUKE ASSUMES NO RISK FOR IN-TRANSIT DAMAGE.

THE FOREGOING WARRANTY IS PURCHASER'S SOLE AND EXCLUSIVE REMEDY AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY, OR FITNESS FOR ANY PARTICULAR PURPOSE OR USE. FLUKE SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES OR LOSS WHETHER IN CONTRACT, TORT, OR OTHERWISE.

## **CLAIMS**

Immediately upon arrival, purchaser shall check the packing container against the enclosed packing list and shall, within thirty (30) days of arrival, give Fluke notice of shortages or any nonconformity with the terms of the order. If purchaser fails to give notice, the delivery shall be deemed to conform with the terms of the order.

The purchaser assumes all risk of loss or damage to instruments upon delivery by Fluke to the carrier. If an instrument is damaged in transit, PURCHASER MUST FILE ALL CLAIMS FOR DAMAGE WITH THE CARRIER to obtain compensation. Upon request by purchaser, Fluke will submit an estimate of the cost to repair shipment damage.

Fluke will be happy to answer all questions to enhance the use of this instrument. Please address your requests or correspondence to: JOHN FLUKE MFG. CO., INC., P.O. BOX C9090, EVERETT, WA 98206,

## INTRODUCTION

The 742A Series are small, light, rugged resistance standards. The standards require no temperature-controlled air or oil bath. The 742A Series are well suited for use as the following:

- Working standards
- Portable transfer standards
- Calibration support for the Fluke 5700A Calibrator

Stability and temperature coefficients of the 742A Series make them ideal for easy transport to and operation in any working environment within the range of 18 to 28°C. The standards come with six-month and one-year uncertainty specifications. Depending on the accuracy required, a 742A can be recertified at intervals based on either specification.

Each 742A comes with a Report of Calibration and a rear panel label showing the measured value. The rear panel also has a Fluke Primary Standards Lab calibration label, labels that show temperature coefficient alpha and beta centered on 23°C, and the standard's serial number.

### NOTE

*Refer to "How Temperature Correction Factors are Calculated," further on in this manual for definitions of alpha and beta.*

## SPECIFICATIONS

Table 1 lists specifications for the available 742A Series Resistance Standards.

**Table 1. 742A Series Resistance Standard Specifications**

MODEL	NOMINAL RESISTANCE AT 23°C	TIME STABILITY		CALIBRATION UNCERTAINTY	MAXIMUM DEVIATION FROM THE 23°C VALUE (18 TO 28°C)	MAXIMUM CURRENT (VOLTAGE)	POWER COEFFICIENT +1 PPM WHEN CURRENT EXCEEDS THE FOLLOWING
		180 DAY	1 YEAR				
742A-1	1Ω	±5.0 ppm	±8.0 ppm	±1.0 ppm	3.0 ppm	500 mA (500 mV)	200 mA
742A-10k	10 kΩ	±2.5 ppm	±4.0 ppm	±1.0 ppm	1.5 ppm	3 mA (30V)	0.6 mA

### GENERAL SPECIFICATIONS:

**Accuracy:** The initial resistance is trimmed to  $\pm 2$  ppm of nominal. The measured value is printed on the rear panel.

**Operating Temperature Range:**  $23 \pm 5^\circ\text{C}$

**Storage Temperature Range:** 0 to  $40^\circ\text{C}$

**Report of Calibration:** The report of calibration includes a table of resistance values in  $0.5^\circ$  increments from 18 to  $28^\circ\text{C}$ .

**Size:** 8.64 cm H x 10.54 cm W x 12.70 cm L (including binding posts)  
(3.4 in H x 4.15 in W x 5.0 in L (including binding posts))  
Binding posts; 2.54 cm (1.0 in)

**Weight:** 0.91 kg (2.0 lbs)

## DESIGN AND CONSTRUCTION NOTES

The 742A Series are constructed of arrays of Fluke wirewound precision hermetically-sealed resistors. No adjustable resistors of any kind are used.

Each 742A is built with a temperature coefficient near zero at 23°C. To further reduce errors caused by temperature changes, the binding posts are constructed of low-thermal emf material.

## FEATURES

Figure 1 shows a front panel view. Figure 2 shows a rear panel view. Table 2 describes binding post functions. Table 3 describes the rear panel labels.

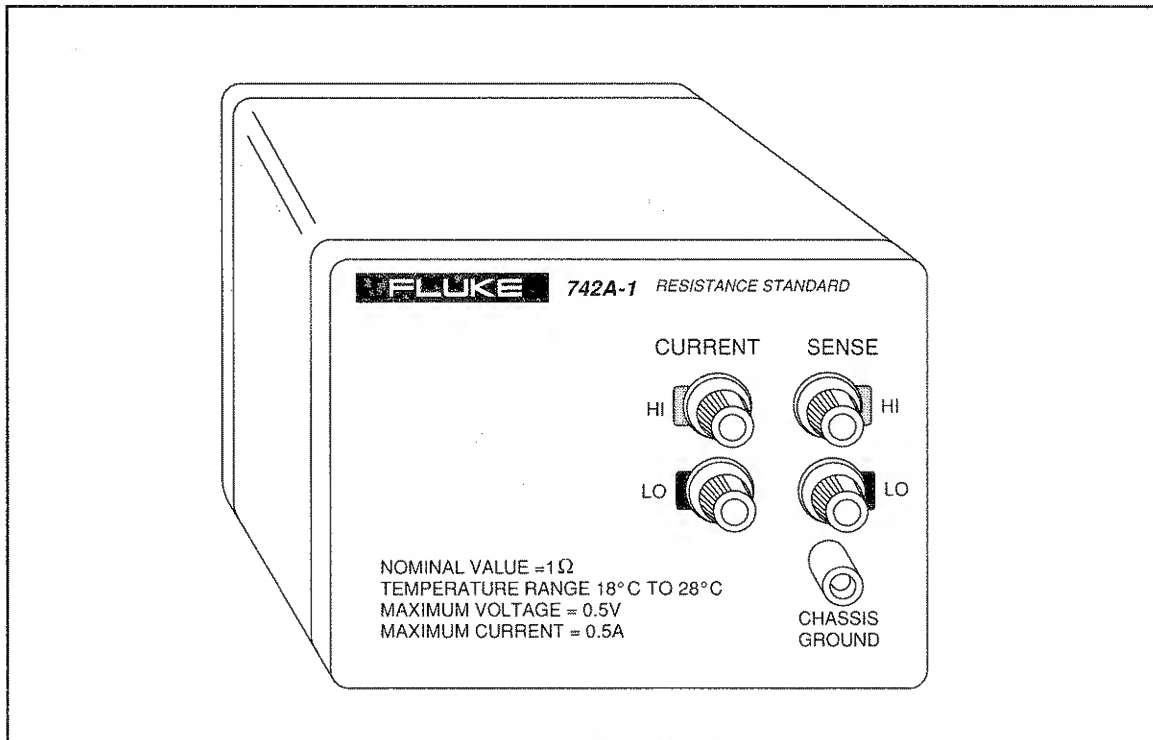


Figure 1. Typical Front Panel View

Table 2. Functions of the Binding Posts

742A BINDING POST	FUNCTION
CURRENT HI	Input for the current source from an ohmmeter
CURRENT LO	Input for the current source from an ohmmeter
SENSE HI	Measurement point for a four-wire ohmmeter
SENSE LO	Measurement point for a four-wire ohmmeter
CHASSIS GROUND	Connected to the case for shielding

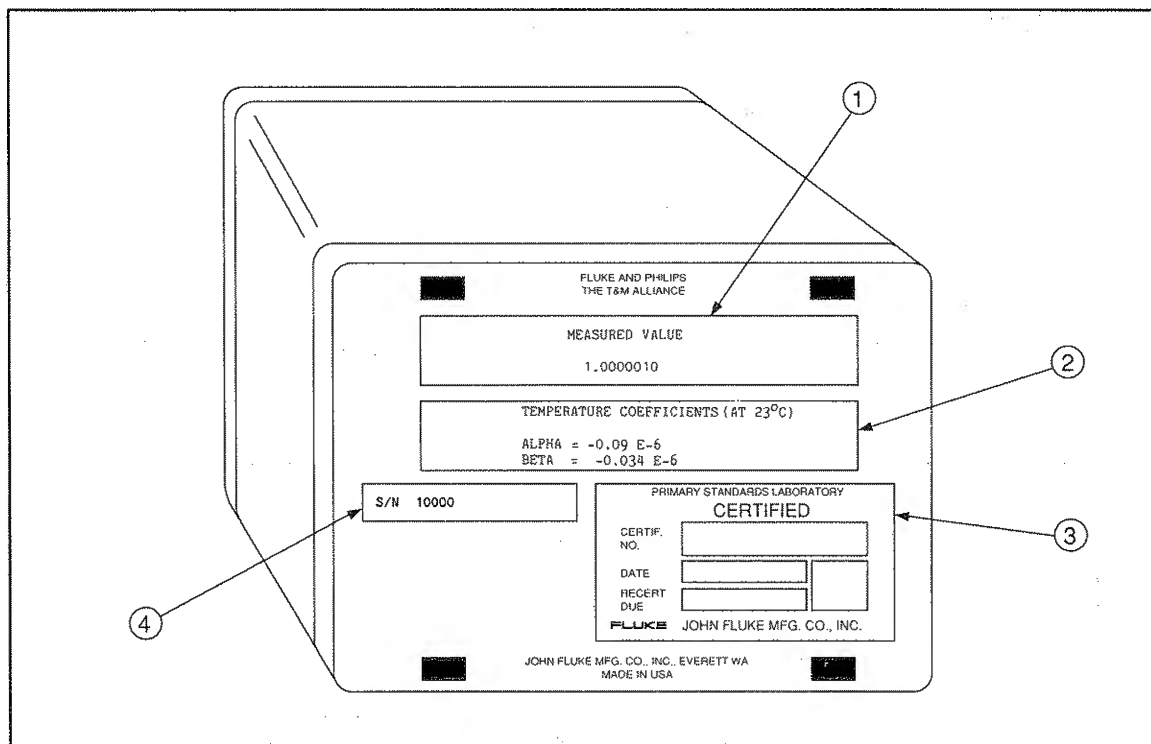


Figure 2. Typical Rear Panel View

Table 3. Contents of the Rear Panel Labels

REF NO.	LABEL INFORMATION
①	Measured value label. Shows the measured value at $23 \pm 0.6^\circ$ ; the same as on the Report of Calibration.
②	Temperature coefficient label. Shows alpha and beta centered on $23^\circ\text{C}$ . Refer to "How Temperature Correction Factors are Calculated," further on in this manual for definitions of alpha and beta, and the formula to predict exact resistance at different temperatures.
③	Fluke Primary Standards Lab Calibration Label documents traceability to the U.S. National Bureau of Standards.
④	Serial number label. Shows the standard's serial number. This number and the full model number (i.e., 742A-1) positively identify a particular unit.

## OPERATING NOTES

This part of the manual explains operational and environmental considerations for the 742A Series. Follow these guidelines when operating or storing the resistance standard. Precautions for handling are under "Care and Maintenance."

### Connecting to the 742A Series

#### CAUTION

**Do not apply voltages above the maximum voltage printed on the front panel. Excessive voltage can cause a permanent shift in resistance value or damage.**

The specifications for models with CURRENT and SENSE binding posts require four-wire connections to the standard. Use these binding posts as described in Table 2.

For the case to act as a shield, the CHASSIS GROUND binding post must be connected to earth ground or instrument guard at some point in a calibration system. Normally when two or more instruments with guards are connected together, the use of a single common grounding point avoids ground loops. If applicable, ground the 742A CHASSIS GROUND binding post to that common grounding point.

Figure 3 shows a typical connection to a four-wire ohmmeter. Figure 4 shows the connection used to calibrate the  $1\Omega$  internal resistance standard in the 5700A.

### Cable Recommendations

For optimum results, use two sets of the Fluke 5440A-7004 Low Thermal Test Leads, which are designed to reduce errors caused by thermal emfs.

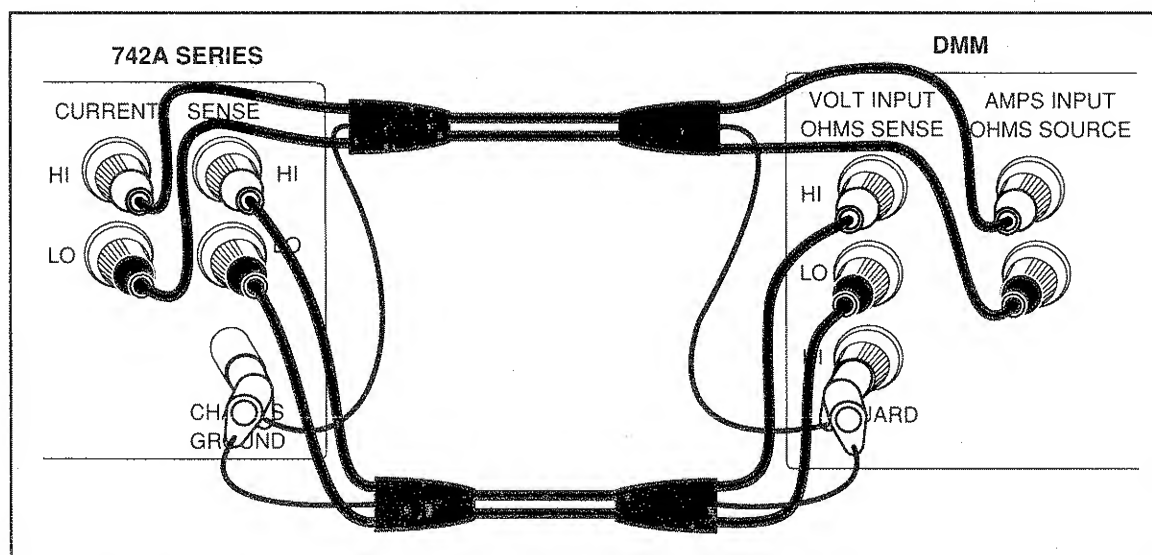


Figure 3. Connection to a Four-Wire Ohmmeter

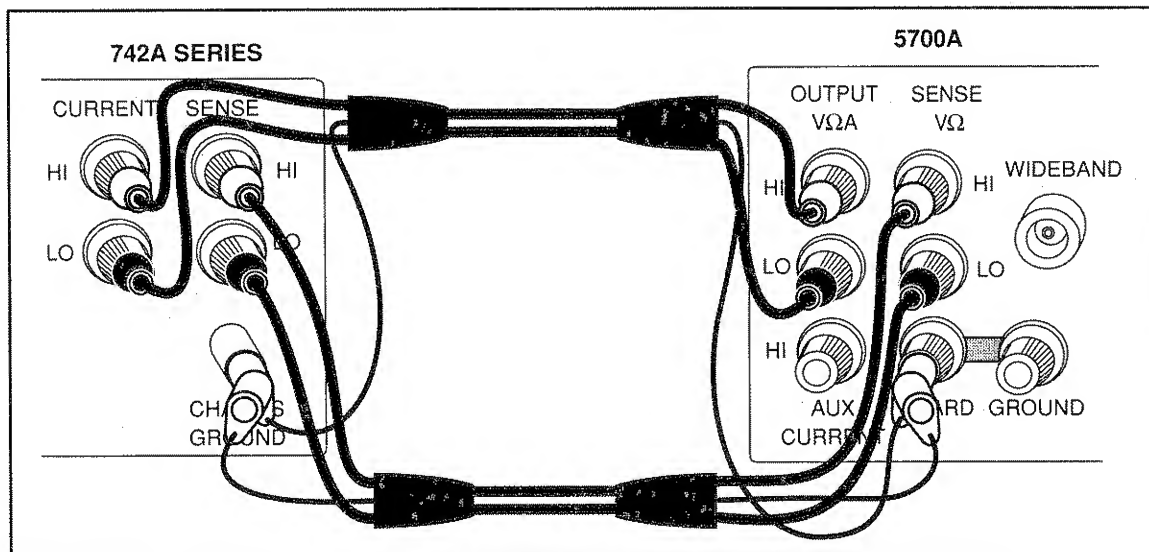


Figure 4. Connection to Calibrate the 5700A

## Operating Temperature Range

You can use the 742A Series in ambient temperatures between 18 and 28°C. To predict the deviation from nominal at temperatures other than 23°C, use the temperature characterization table provided with each unit. The table shows the calculated value and the deviation from nominal at temperatures between 18 and 28°C in half-degree increments. An example of this table is included as Table 4.

## How Temperature Correction Factors are Calculated

A label on the rear panel shows temperature coefficient factors alpha and beta centered on 23°C. (See Figure 2 for the label location.) The values of alpha and beta are individualized for each 742A. Alpha and beta are established by measurement in the Fluke Primary Standards Lab at 18°C, 23°C, and 28°C. The temperature characterization table is generated from these three measurements and the following formula:

$$R_t = R_{23} [ 1 + \alpha (t - 23) + \beta (t - 23)^2 ]$$

Where,  $R_t$  = Resistance at  $t^\circ\text{C}$   
 $R_{23}$  = Resistance at 23°C  
 $\alpha$  = Slope of the curve (ppm/°C) at 23°C  
 $\beta$  = Rate of change of slope of the curve (ppm/°C<sup>2</sup>)

$\alpha$  and  $\beta$  are constants which do not change appreciably over time and hence need to be determined only once.

In the case of the example 742A-1 used in this manual,  $\alpha$  and  $\beta$  are calculated as follows:

$$\alpha = \frac{(R_{28} - R_{18})}{\Delta t} = \frac{-0.9 \text{ E-6}}{10} = -0.09 \text{ E-6}$$

$$\beta = \frac{\left( \frac{R_{28} + R_{18}}{2} - R_{23} \right)}{\left( \frac{\Delta t}{2} \right)^2} = \frac{-0.85 \text{ E-6}}{25} = -0.034 \text{ E-6}$$

Where,  $R_{28}$  = Resistance at 28°C  
 $R_{18}$  = Resistance at 18°C  
 $R_{23}$  = Resistance at 23°C  
 $\Delta t = (28 - 18) = 10$



Table 4. Example 742A-1 Temperature Characterization Chart

Test Number: XXXX  
Date: 04-Aug-88  
Page 2 of 2

Serial No.: XXXXXX  
Alpha = -0.090 E-6  
Beta = -0.034 E-6

Temp (Celsius)	Resistance ( OHMS )	Dev from nominal (in ppm)
18.0	1.0000006	0.6
18.5	1.0000007	0.7
19.0	1.0000008	0.8
19.5	1.0000009	0.9
20.0	1.0000010	1.0
20.5	1.0000010	1.0
21.0	1.0000010	1.0
21.5	1.0000011	1.1
22.0	1.0000011	1.1
22.5	1.0000010	1.0
23.0	1.0000010	1.0
23.5	1.0000009	0.9
24.0	1.0000009	0.9
24.5	1.0000008	0.8
25.0	1.0000007	0.7
25.5	1.0000006	0.6
26.0	1.0000004	0.4
26.5	1.0000003	0.3
27.0	1.0000001	0.1
27.5	0.9999999	-0.1
28.0	0.9999997	-0.3

Figure 5 shows a graph of the value of the 742A-1 represented by the sample temperature characterization chart (Table 4). To illustrate use of the formula, calculations for resistance at 20°C and 26°C are shown. You can see that using the formula shown with alpha and beta you get the same value as in the characterization table.

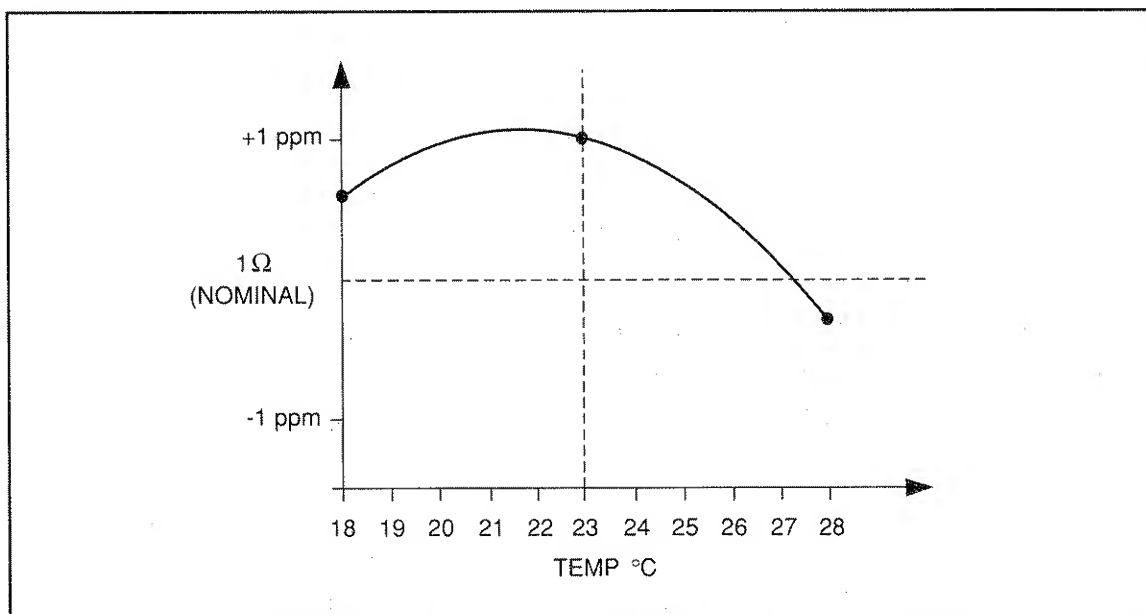


Figure 5. Graph of Resistance VS. Temperature for Sample 742A-1

$$\begin{aligned}
 R_t &= R_{23} [1 + \alpha (t - 23) + \beta (t - 23)^2] \\
 \text{At } &= 20^\circ\text{C}, \\
 R_{20} &= 1.0000010 [1 + (-0.09 \text{ E-}6) (-3) + (-0.034 \text{ E-}6) (-3)^2] \\
 &= 1.0000010 (1.0000003 - 0.0000003) \\
 &= 1.0000010 (1.0000000) \\
 &= 1.0000010\Omega
 \end{aligned}$$

$$\begin{aligned}
 R_t &= R_{23} [1 + \alpha (t - 23) + \beta (t - 23)^2] \\
 \text{At } &= 26^\circ\text{C}, \\
 R_{26} &= 1.0000010 [1 + (-0.09 \text{ E-}6) (3) + (-0.034 \text{ E-}6) (3)^2] \\
 &= 1.0000010 (1 - 0.0000003 - 0.0000003) \\
 &= 1.0000010 (1 - 0.0000006) \\
 &= 1.0000004\Omega
 \end{aligned}$$

### Storage Temperature Range

To maintain accuracy within the specified limits, do not subject the 742A Series to temperatures below 0°C or above 40°C. If exposure to temperatures outside this range is unavoidable, you can minimize the adverse effects by doing the following:

- Keep the standards in the optional transit case (Option 742A-7002). The transit case is insulated and helps protect the standards during short-term temperature extremes.
- Keep exposure to temperature extremes brief.

## **CARE AND MAINTENANCE**

The only maintenance procedure for the 742A Series is occasional cleaning. The following text gives cleaning instructions and precautions for handling.

### **Cleaning the 742A Series**

To keep the 742A Series looking like new, clean the outer surfaces using a soft cloth slightly dampened with water or a non-abrasive mild cleaning solution that does not harm plastics.

### **CAUTION**

**Do not use aromatic hydrocarbons or chlorinated solvents for cleaning. They can damage the plastic materials used in the resistance standard.**

### **Precautions for Handling**

The 742A Series are designed for mechanical stability, but do not abuse the standard with excessive shock. Avoid temperature extremes as mentioned under "Storage Temperature Range". When you transport the standard, it is recommended that you use the Option 742A-7002 Transit Case for shock and temperature protection. The case holds two 742A Series Resistance Standards.

## **SERVICING INFORMATION**

Because the 742A Series are certified and non-adjustable resistance standards, they are considered non-user repairable. If the unit is damaged, it must be returned to the factory for repair and recalibration.

## **RECERTIFICATION**

For recertification, send the resistance standard to a Fluke technical center. For a nominal fee, Fluke will remeasure and recertify the value of your 742A based on comparison to standards traceable to the U.S. National Bureau of Standards. A new temperature characterization chart is provided on recertification. If you wish, you can record the changes at each recertification and use this data to more closely predict the performance of your 742A. A list of sales and service centers is located near the end of this manual.



# Sales and Service Centers

## U.S. SALES AREAS for all Fluke products

### Alabama

#### Huntsville

4920 Corporate Drive  
Suite J  
Huntsville, AL 35805-6202  
(205) 837-0581

### Arizona

#### Tempe

2211 S. 48th Street  
Suite B  
Tempe, AZ 85282  
(602) 438-8314

#### Tucson

(602) 790-9881

### California

#### Burbank

2020 N. Lincoln Street  
Burbank, CA 91504  
(213) 849-7181

#### Northern

2300 Walsh Ave., Bldg. K  
Santa Clara, CA 95051  
(408) 727-0513

#### San Diego

(619) 292-7657

#### Southern

P.O. Box 19676  
Irvine, CA 92713-9676  
16969 Von Karman  
Suite 100  
Irvine, CA 92714  
(714) 863-9031

### Colorado

#### Denver

14180 E. Evans Ave.  
Aurora, CO 80014  
(303) 695-1000

### Connecticut

#### Hartford

Glen Lochen East  
41-C New London Turnpike  
Glastonbury, CT 06033  
(203) 659-3541

### Florida

#### Clearwater

(813) 799-0087

### Miami

(305) 462-1380

### Orlando

940 N. Fern Creek Ave.  
Orlando, FL 32803  
(305) 896-4881

### Tampa

(813) 251-9211

### Georgia

#### Atlanta

2700 Delk Road  
Suite 150  
Marietta, GA 30067  
(404) 953-4747

### Illinois

#### Chicago

1150 W. Euclid Avenue  
Palatine, IL 60067  
(312) 705-0500

### Indiana

#### Indianapolis

8777 Purdue Road  
Suite 101  
Indianapolis, IN 46268  
(317) 875-7870

### Louisiana

#### New Orleans

(504) 455-0814

### Massachusetts

#### Boston

Middlesex Technology Center  
900 Middlesex Turnpike  
Building 8  
Billerica, MA 01821  
(617) 663-2400

### Maryland

#### Baltimore

(301) 792-7060

#### Rockville

5640 Fishers Lane  
Rockville, MD 20852  
(301) 770-1570

### Michigan

#### Detroit

33031 Schoolcraft  
Livonia, MI 48150  
(313) 522-9140

### Minnesota

#### Bloomington

1801 E. 79th St.  
Suite 9  
Bloomington, MN 55420  
(612) 854-5526

### Missouri

#### St. Louis

11756 Borman Drive  
Suite 160  
St. Louis, MO 63146  
(314) 993-3805

### North Carolina

#### Greensboro

1310 Beaman Place  
Greensboro, NC 27408  
(919) 273-1918

### New Jersey

#### Paramus

P.O. Box 930  
Paramus, NJ 07653-0930  
West 75 Century Road  
Paramus, NJ 07652  
(201) 262-9550

### New Mexico

#### Albuquerque

(505) 881-3550

### New York

#### Rochester

4515 Culver Road  
Rochester, NY 14622  
(716) 323-1400

### Ohio

#### Cleveland

Plaza South Three  
Suite 402  
7271 Engle Road  
Middleburg Heights, OH 44130  
(216) 234-4540

### Oklahoma

#### Northeast

(405) 236-2977

### Oregon

#### Portland

(503) 227-2042

### Pennsylvania

#### Malvern

200 Lindenwood Drive  
Malvern, PA 19355  
(215) 647-9550

#### Pittsburgh

(412) 261-5171

### Texas

#### Austin

(512) 459-3344

#### Dallas

1801 Royal Lane  
Suite 307  
Dallas, TX 75229  
(214) 869-0311

#### El Paso

(915) 533-3508

#### Houston

(713) 240-5995

#### San Antonio

10417 Gulfdale  
San Antonio, TX 78216  
(512) 340-0498

### Utah

#### Salt Lake City

(801) 268-9331

### Washington

#### Seattle

5020 148th Ave. N.E.  
Suite 110  
Redmond, WA 98052  
(206) 881-6966

### Washington, DC

#### Washington, DC

(301) 770-1570

# INTERNATIONAL SALES OFFICES

## Algeria

**Bureau de Liaison Philips**  
(For Philips products)  
24 rue Bougainville  
El Mouradia, Alger  
Tel: 60 14 05  
TLX: 62221

## Antilles

**Philips Antillana N.V.**  
(For Philips products)  
Schottegatweg Oost 146  
P.O. Box 3523  
Willemstad, Curacao  
Tel: 599-9-615277  
TLX: 1047

## Argentina

**Coasin S.A.**  
(For Fluke products)  
Virrey del Pino 4071DPTO E-65  
1430 CAP FED  
Buenos Aires, Argentina  
Tel: (54) (1) 552-5248  
TLX: (390) 22284

## Philips Argentina S.A.

(For Philips products)  
Casilla Correo 3479  
Vedia 3892  
1430 Buenos Aires  
Tel: 54-1-5414106/5417141  
TLX: 21359/21243

## Australia

**Elmeasco Instruments Pty, Ltd.**  
(For Fluke products)  
P.O. Box 30  
Concord, N.S.W. 2137  
Australia  
Tel: (61) (2) 736-2888  
TLX: (790) AA25887  
FAX: (61) 2-733663

## Elmeasco Instruments Pty, Ltd.

(For Fluke products)  
P.O. Box 623  
12 Maroondah Highway  
Ringwood, Victoria 3134  
Australia  
Tel: (61) (3) 879-2322  
TLX: (790) AA30418  
FAX: (61) 3-879-4310

## Elmeasco Instruments Pty, Ltd.

(For Fluke products)  
P.O. Box 274  
Salisbury, Qld Australia 4107  
Tel: (61) (7) 875-1444  
TLX: (790) AA44062

## Elmeasco Instruments Pty, Ltd.

(For Fluke products)  
P.O. Box 154  
Prospect, South Australia 5082  
Tel: (61) (8) 344-9000

## Elmeasco Instruments Pty, Ltd.

(For Fluke products)  
32 Teddington Rd.  
Victoria Park  
Western Australia 6100  
Tel: (61) 9-470-1855

## Philips Scientific & Industrial

**Equipment Division**  
(For Philips products)  
Centrecourt 25-27 Paul Street  
North Ryde  
Sydney N.S.W. 2113  
Tel: 88 88 222

## Austria

**Walter Rekirsch Elektronische  
Geräte GmbH & Co.**  
(For Fluke products)  
Vertrieb KG  
Obachgasse 28  
1220 Vienna, Austria  
Tel: (43) (222) 253626  
TLX: (847) 134759  
FAX: (43) (222) 257275

## Osterreichische Philips Industrie GmbH

(For Philips products)  
Geschäftsbereich I & E  
Marktbereich Test-und Meßgeräte  
A-1101 WIEN, Triester Straße 64  
Tel: (0222) 60101/1772 DW

## Bahrain

**Basma W.L.L.**  
(For Fluke products)  
P.O. Box 5701  
Manama, Bahrain  
Tel: (973) 251-364  
TLX: (955) 9003  
FAX: (965) 245218

## Bangladesh

**Motherland Corporation**  
(For Fluke products)  
24 Hatkhola Road, Tikatuli  
Dacca-3, Bangladesh  
Tel: 257249, TLX: (950) 642022

## Philips Bangladesh Ltd.

(For Philips products)  
P.O. Box 62, Ramna  
16/17 Kawran Bazar C/A  
DHAKA  
Tel: 411976  
TLX: 65668

## Belgium

**N.V. Philips Professional Systems S.A.**  
**Test and Measurement**  
Tweestationsstraat 80  
Rue des Deux Gares  
Brussel 1070 Bruxelles  
Tel: 2-5256111

## Bolivia

**Coasin Bolivia S.R.L.**  
(For Fluke products)  
Casilla 7295  
La Paz, Bolivia  
Tel: (591) (2) 40962  
TLX: (336) 3233 COALAP BV

## Brazil

**ATP Hi-Tek Eletronica Ltda.**  
(For Fluke products)  
Al. Amazonas 422, Alphaville  
Barueri  
CEP 06400, Sao Paulo, Brazil  
Tel: (55) (11) 421-5477  
TLX: (391) 1171413

## Philips do Brasil Ltda.

(For Philips products)  
Av. Eng. Luiz Carlos Berrini 3009  
Caixa Postal 8681  
04571 SAO PAULO S.P.  
Tel: 55-11-2411611  
TLX: (011) 32750

## Brunei

**Rank O'Connor's, Sdn Bhd**  
(For Fluke products)  
No. 8 Block D,  
Sufri Shophouse Complex  
Mile 1 Jalan Tutong  
Bandar Seri Begawan  
Negara Brunei Darussalam  
Tel: (673) (2) 23109 or 23557  
TLX: (799) BU2265 RANKOC

## Canada

**Fluke Electronics Canada Inc.**  
400 Britannia Rd. East Unit #1  
Mississauga, Ontario  
L4Z 1X9 Canada  
Tel: (416) 890-7600  
FAX: (416) 890-6866

## Fluke Electronics Canada Inc.

1690 Woodward Drive  
Suite 216  
Ottawa, Ontario  
K2C 3R8 Canada  
Tel: (613) 723-9453  
FAX: (613) 723-9458

## Fluke Electronics Canada Inc.

1255 Trans Canada Highway  
Suite 130  
Dorval, Quebec  
H9P 2V4 Canada  
Tel: (514) 685-0022  
FAX: (514) 685-0039

## Fluke Electronics Canada Inc.

101, 1144 - 29th Ave. N.E.  
Calgary, Alberta  
T2E 7P1 Canada  
Tel: (403) 291-5215  
FAX: (403) 291-5219

## Chile

**Intronica Chile, Ltda.**  
(For Fluke products)  
Casilla 16228  
Santiago 9, Chile  
Tel: (56) 2-2321886  
TLX: (332) 346351

## Philips Chilena S.A.

**de Produc. Electr.**  
(For Philips products)  
Avenida Santa-Maria 0760  
Casilla 2687  
Santiago De Chile  
Tel: 56-2-770038  
TLX: 240239

## China, Peoples Republic of

**Fluke International Corp.**  
(For Fluke products)  
P.O. Box C9090 M/S 206A  
Everett, WA 98206 U.S.A.  
Tel: (206) 356-5511  
TLX: 185103 FLUKE UT  
FAX: (206) 356-5116

## Colombia

**Sistemas E Instrumentacion, Ltda.**  
(For Fluke products)  
Carrera 13, No. 37-43, Of. 401  
Ap. Aereo 29583  
Bogota DE, Colombia  
Tel: (57) 232-4532  
TLX: (396) 45787

## Industrias Philips de Colombia S.A.

(For Philips products)  
Apartado Aereo 4282  
Calle 13 No. 51-39  
Bogota  
Tel: 57-1-2600600  
TLX: Philcolon 44776

## Cyprus

**Chris Radiovision, Ltd.**  
(For Fluke products)  
P.O. Box 1989  
Nicosia, Cyprus  
Tel: (357) (21) 66121  
TLX: (826) 2395

## Cyprus, Northern

**Ucok Buroteknik**  
(For Fluke products)  
2C & 2D Muftu Ziyai Street  
Lefkosa, Northern Cyprus  
Mersin 10, Turkey  
Tel: (90) (741) 357-20-71777  
TLX: (821) 57267

## Denmark

**Tage Olsen A/S**  
(For Fluke products)  
Ballerup Byvej 222  
2750 Ballerup  
Denmark  
Tel: (45) (2) 658111  
TLX: (855) 35293  
FAX: (45) 2-680 300

## Philips A/S Test & Measurement

(For Philips products)  
Prags Boulevard 80  
DK-2300-Kobenhavn S  
Tel: (01) 572222  
TLX: 31201

## Ecuador

**Proteco Coasin Cia., Ltda.**  
(For Fluke products)  
P.O. Box 228-A  
Ave. 12 de Octubre 2285  
y Orellana  
Quito, Ecuador  
Tel: (593) (2) 529684  
TLX: (393) 22085

## Philips Ecuador S.A.

(For Philips products)  
Casilla 343  
Paez 118 y Avenida Patria  
Quito  
Tel: 593-2-546100/546125  
TLX: 2227 PHLPSQ ED

## Proteco Coasin Cia., Ltda.

(For Fluke products)  
P.O. Box 9733  
Ave. Principal No. 204 y Calle Segunda  
Urbanizacion Miraflores  
Guayaquil, Ecuador  
Tel: (593) (4) 387519

## Egypt and Sudan

**Electronic Engineering  
Liaison Office**  
(For Fluke products)  
P.O. Box 2891 Horreya  
11361 Heliopolis, Cairo  
Egypt  
Tel: (20) 2-695705  
TLX: (927) 22782

**Philips Egypt Liaison Office of Philips**  
(For Philips products)  
Export B.V.  
10, Abdel Rahman el Rafei Str.  
P.O. Box 1687  
Dokki, Cairo  
Tel: 20-2-3490922  
TLX: 22816 PHEGY UN

**Ethiopia**  
(For Philips products)  
Philips Ethiopia (Priv. Ltd. Co.)  
Ras Abebe Areguay Avenue  
P.O. Box 2565  
Addis Ababa  
Tel: 148300

**Fiji**  
**Awa New Zealand Ltd.**  
(For Fluke products)  
37 Freestone Walu Bay Road  
P.O. Box 858  
Suva, Fiji  
Tel: (679) 312079  
TLX: (792) 2347  
FAX: (679) 314379

**Finland**  
**Instrumentarium Elektronikka**  
(For Fluke products)  
P.O. Box 64  
02631 Espoo 63  
Finland  
Tel: (358) (0) 5281  
TLX: (857) 124426  
FAX: (358) 0-502-1073

**OY Philips AB**  
(For Philips products)  
P.O. Box 11  
02631 ESPOO  
Tel: 0-5257225

**France**  
**M.B. Electronique S.A.**  
(For Fluke products)  
606 Rue Fournay  
P.O. Box 31  
78530 BUC, France  
Tel: (33) (1) 39568131  
TLX: (842) 695414  
FAX: (33) (1) 3956-53-44

**S.A. Philips Industrielle et Commerciaux**  
**Division Science et Industrie**  
(For Philips products)  
105 rue de Paris, BP 62  
93002 BOBIGNY Cedex  
Tel: (1) 49 42 80 80  
TLX: 210290

**Germany**  
**Philips GmbH**  
(For Philips products)  
Unternehmensbereich  
Elektronik für Wissenschaft  
und Industrie  
Vertriebsbereich Testr and Meßtechnik  
Miramstraße 87 Postfach 310320  
D-3500 KASSEL  
Tel: (0561) 5010. TLX: 997070

**Bereich Fluke Produkts**  
Oskar-Messter-Strape 18  
D-8045 Ismaning

**Great Britain**  
**Philips Test & Measurement**  
York Street  
Cambridge CB1 2PX  
Tel: (0223) 358866  
TLX: 817331

**Philips Test & Measurement**  
(For Fluke products)  
Colonial Way  
Watford WD2 4TT

**Greece**  
**Hellenic Scientific Representations Ltd.**  
(For Fluke products)  
11 Vrassida Street  
Athens 612, Greece  
Tel: (30) (1) 7211140  
TLX: (863) 219330

**Philips S.A. Hellenique I&E Division**  
(For Philips products)  
15, 25th March Street  
GR-17778 TAVROS or  
P.O. Box 3153 Athens  
Tel: 30-1-4894911  
TLX: 241566-241567

**Hong Kong**  
**Fluke Asia Ltd.**  
(For Fluke products)  
Shun Tak Centre  
Suite No. 1501  
200 Connaught Road  
Central, Hong Kong  
Tel: (852) 5-482116  
FAX: (852) 5-479863  
TLX: (780) 87058 Fluke HX

**Philips Hong Kong Ltd.**  
(For Philips products)  
29/F Hopewell Centre  
17 Kennedy Road  
G.P.O. Box 2108  
Hong Kong  
Tel: 852-5-283298  
TLX: 73660 PHILH HX

**Schmidt & Co (H.K.), Ltd**  
(For Fluke products)  
18th Floor, Great Eagle Centre  
23 Harbour Road  
Wanchai, Hong Kong  
Tel: (852) (5) 8330-222  
TLX: (780) 74766 or 76762  
FAX: (852) 5-8918754

**India**  
**Hinditron Services Pvt., Ltd.**  
(For Fluke products)  
69/A.L. Jagmohandas Marg  
Bombay 400 006, India  
Tel: (22) 8121316, (91) (22) 8125344  
TLX: (953) 1175326

**Hinditron Services Pvt., Ltd.**  
(For Fluke products)  
8th Main Road  
33/44A Raj Mahal Vilas Extension  
Bangalore 560 080, India  
Tel: (91) 812-363139, TLX: (953) 8452741

**Hinditron Services Pvt. Ltd.**  
(For Fluke products)  
5th Floor, "Castle House"  
5/1A, Hungerford St.  
Calcutta 700 017, India  
Tel: (91) 33-432628, TLX (953) 21-4153

**Hinditron Services Pvt. Ltd.**  
(For Fluke products)  
204-5-6 Hemkunt Tower  
98 Nehru Place  
New Delhi, 110019, India  
Tel: (91) 11-6410380, TLX: (953) 316458

**Hinditron Services Pvt., Ltd.**  
(For Fluke products)  
Emerald Complex 1-7-264  
5th Floor  
114 Sarojini Devi Rd.  
Secunderabad 500 003, India  
Tel: 842 821117, TLX: (953) 04256973

**Peico Electronics & Electricals Ltd.**  
(For Philips products)  
Shivsagar Estate, Block 'A'  
Dr. Annie Besant Road  
P.O.B. 6598  
Worli, Bombay 400018  
Tel: 4921500/4921513

**Indonesia**  
**P.T. Lamda Triguna**  
(For Fluke products)  
Tel: (62) 21-8195365  
TLX: (796) 45483 LOMAS I.A.  
P.O. Box: 6/JATJG, Jakarta 13001

**P.T. Daeng Brothers**  
(For Philips products)  
Centre Point Building, 3rd Fl.  
Jalan Gatot Subroto Kav. 35/36  
P.O. Box 41 Tebet  
Jakarta  
Tel: 62-21-517900  
TLX: 62798 PHDC IA

**Iran**  
**Philips Iran Ltd.**  
(For Philips products)  
(Private Joint Stock Comp.)  
P.O. Box 11365-3891  
Tehran  
Tel: 98-21-674138  
TLX: 212545 PHPS IR

**Iraq**  
**Philips Midden Oosten B.V.**  
(For Philips products)  
Baghdad Branch  
Hai Al Whida. Area No. 902  
Street No. 12, Bldg. 141/10  
P.O. Box 5749  
Baghdad  
Tel: 7187181  
TLX: 212439 Philips IK

**Ireland**  
**Circuit Specialists Limited**  
(For Fluke products)  
Unit 5 Enterprise Centre  
Plassey Technological Park  
Castleroy, Limerick  
Ireland  
Tel: (852) (61) 330333  
TLX: (852) 70092

**P.J. Brennan and Company Ltd.**  
(For Philips products)  
61 Stillorgan Industrial Park  
Stillorgan, Co. Dublin  
Tel: 952501  
TLX: 3817  
FAX: 952333

**Israel**  
**R.D.T. Electronics Engineering Ltd.**  
P.O. Box 43137  
Tel Aviv 61430  
Israel  
Tel: (972) (3) 483211, TLX: 371452  
FAX: 972-3-492190

**Italy**  
**Sistrel S.p.A.**  
(For Fluke products)  
Via Pelizza da Volpedo 59  
20092 Cinisello Balsamo  
Milan, Italy  
Tel: (39) (2) 6181893, TLX: (843) 334643  
FAX: (39) 2-6182440

**Sistrel S.p.A.**  
(For Fluke products)  
Via le Erminio Spalla No. 41  
00142 Rome, Italy  
TLX: (843) 625857, FAX (39) 6-504137

**Sistrel S.p.A.**  
(For Fluke products)  
Via Cintia  
Parco S. Paolo 35  
80126 Naples, Italy  
Tel: (39) (81) 7679700  
FAX (39) 81-7661361

**Philips S.p.A.**  
(For Philips products)  
Sezione S & I, T & M Dept.  
Viale Elvezia 2  
20052 Monza  
Tel: (039) 3635240/8/9  
TLX: 333343

**Japan**  
**John Fluke Mfg. Co., Inc.**  
Japan Branch  
(For Fluke products)  
Sumitomo Higashi Shinbashi Bldg.  
1-1-11 Hamamatsucho  
Minato-ku, Tokyo 105, Japan  
Tel: (81) (3) 434-0181  
TLX: (781) 2424331  
FAX: 81-3-434-0170

**John Fluke Mfg. Co., Inc.**  
Japan Branch  
(For Fluke products)  
Katsushige Building  
2-45 Kohraibashi  
Higashi-ku, Osaka 541  
Japan  
Tel: (81) (6) 229-0871  
FAX: 81-6-229-1098

**NF Circuit Design Block Co., Ltd.**  
(For Philips products)  
3-20 Tsunashima Higashi, 6-Chome,  
Kokokuku, Yokohama 223  
Tel: (045) 452-0411  
TLX: 3823-297

**Kenya**  
**Philips (Kenya) Ltd.**  
(For Philips products)  
OL Kalou Road, Industrial Area  
P.O. Box 30554  
Nairobi  
Tel: 254-2-557999, TLX: 22225 Nairobi

**Korea, Republic of**  
**Myoung Corporation**  
(For Fluke products)  
Yeo Eui Do  
P.O. Box 14  
Seoul, Korea  
Tel: (82) (2) 784-9942  
TLX: MYOUNG K24283  
FAX (82) 2-784-2387

**Kuwait**  
**Al Bahar International Group**  
(For Fluke products)  
P.O. Box 26672 Safat  
13127 Safat, Kuwait  
Tel: (965) 848601. TLX: (959) 44822

**Lebanon and Jordan**  
**Mabek (Electronic Division)**  
(For Fluke products)  
P.O. Box 13-5657  
Beirut, Lebanon  
Tel: 812523. TLX: (923) 22889

**Philips Middle East S.A.R.L.**  
(For Philips products)  
B.P. 11-670  
Ave. Sami Solh  
Beyrouth  
Tel: 392320/1  
TLX: 20765 LE PHIBAN

**Malaysia**  
**Mecomb Malaysia SDN BHD**  
(For Fluke products)  
P.O. Box 24  
46700 Petaling Jaya  
Selangor, Malaysia  
Tel: (60) 3-7743422. TLX: (784) MA37764  
FAX: (60) 3-774 3414

**Philips Malaysia Snd. Bhd./**  
**Wisma Philips**  
(For Philips products)  
1st. 2nd. 3rd Floors, 3 Jalan  
SS 15/2a, P.O. Box 12163  
Subang Jaya  
47500 Petaling Jaya  
Tel: 60-3-7345511  
TLX: PHIMAL MA 25111

**Malta**  
**Fabian Enterprises**  
(For Fluke products)  
20. Msida Road  
Gzira, Malta  
Tel: 513283/40216. TLX: (838) 1837

**Mexico**  
**Mexicana de Electronica**  
**Industrial S.A. (MEXEL)**  
Diagonal No. 27  
Entre Calle de Eugenia Y Ave.  
Colonia del Valle  
C.P. 03100, Mexico  
Tel: (905) 660-4323. TLX: (383) 1771038

**Morocco**  
**Oussama S.A.**  
(For Fluke products)  
Angle Boulevard Emile Zola et  
Rue Rethel  
P.O. Box 2007 Casa  
Casablanca, Morocco  
Tel: (212) 24-13-38. TLX: (933) 22730 M

**Somaciel**  
(For Philips products)  
304 Boulevard Mohamed V,  
Casablanca 05  
Tel: 30 80 51/52  
TLX: 27021

**Nepal**  
**Associated Enterprises**  
(For Fluke products)  
GPO Box 790, Pyaphal Tole  
Kathmandu, Nepal  
Tel: 13868. TLX: 2568

**Netherlands**  
**Philips Nederland**  
**Test en Meetapparaten**  
Hoevenseweg 55A  
5017 AD TILBURG  
Postbus 115  
5000 AC TILBURG  
Tel: 013-352455  
TLX: 52683

**Fluke European Headquarters**  
(For Fluke products)  
P.O. Box 2269  
5600 CG Eindhoven  
The Netherlands  
Tel: (40) 458045. TLX: (844) 51846  
FAX: 31-40-457515

**New Zealand**  
**Northrop Instruments & Systems Ltd.**  
(For Fluke products)  
Information Technology Group  
131 Khyber Pass Road  
Private Bag, Newmarket  
Auckland 1, New Zealand  
Tel: (64) (9) 501-801. TLX: (791) 21570  
FAX: 64-9-543430

**Northrop Instruments & Systems Ltd.**  
(For Fluke products)  
Information Technology Group  
First Floor, Northrop Bldg.  
189-191 Willis Street  
P.O. Box 2406  
Wellington, New Zealand  
Tel: (64) (4) 856-658. TLX: (791) 3380

**Northrop Instruments & Systems Ltd.**  
(For Fluke products)  
Information Technology Group  
110 Mandeville Street  
P.O. Box 8388  
Christchurch, New Zealand  
Tel: (64) (3) 488-874. TLX: (791) 4801

**Philips New Zealand Ltd.**  
**Industrial & Electro-acoustic**  
**Systems Division**  
2 Wagener Place, P.O. Box 4 021  
Auckland 3, New Zealand  
Tel: (09) 894-160  
TLX: NZ 2395. FAX: (9) 862-728

**Nigeria**  
**Associated Electronic Products**  
**(Nigeria) Ltd.**  
(For Philips products)  
KM 16, Ikorodu Road, Ojota  
P.O. Box 1921  
Lagos  
Tel: 234-1-900160/69  
TLX: 21961 NG

**Norway**  
**Morgenstjerne & Co A/S**  
(For Fluke products)  
Konghellegate 3  
P.O. Box 6688, Rodelokka  
Oslo 5, Norway  
Tel: (47) (2) 356110. TLX: (856) 71719  
FAX: (47) 2-381457

**Norsk Al/S Philips**  
(For Philips products)  
Dept. I&E, Test & Measurement  
Sandstuveien 70, P.O. Box 1  
Manglerud  
Oslo 6  
Tel: 2-680200

**Oman**  
**OHI Telecommunications**  
(For Fluke products)  
P.O. Box 889  
Muscat, Oman  
Tel: (968) 603606. TLX: (926) 5052

**Pakistan**  
**International Operations**  
**(PAK Private), Ltd.**  
(For Fluke products)  
505 Muhammadi House  
I.I. Chundrigar Road  
P.O. Box 5323, Karachi, Pakistan  
Tel: (21) 221127. TLX: (952) 24494

**Philips Electrical Co. of Pakistan Ltd.**  
(For Philips products)  
P.O. Box 7101  
M.A. Jinnah Road  
Karachi 3  
Tel: 92-21-725772  
TLX: 2874 PHPAK PK

**Paraguay**  
**Philips del Paraguay S.A.**  
(For Philips products)  
Avenida Artigas 1519  
Casilla de Correo 605  
Asuncion  
Tel: 595-21-291924  
TLX: PY 215

**Peru**  
**Importaciones y Representaciones**  
**Electronicas S.A.**  
(For Fluke products)  
Avda. Franklin D. Roosevelt 105  
Lima 1, Peru  
Tel: (51) (14) 28-8650. TLX: (394) 25663

**Philips Peruana S.A.**  
(For Philips products)  
Av. Alfonso Ugarte 1268  
Lima 5 or Apartado 1841  
Lima 100  
Tel: 51-14-326070  
TLX: 21678 PE PHILPER

**Philippines, Republic of**  
**Spark Radio & Electronics, Inc.**  
(For Fluke products)  
Greenhills P.O. Box 610  
San Juan, Metro Manila, 3113  
Philippines  
Tel: (2) 775192. TLX: (722 or 732) 27901

**Philips Industrial Development Inc.**  
(For Philips products)  
2246. Pasong Tamo  
P.O. Box 911  
MCCPO Makati Riazal D  
Metro Manila  
Tel: 63-2-868951

**Portugal**  
**Decada Espectral**  
**Equipamentos de Electronica**  
(For Fluke products)  
Av. Bombeiros Voluntarios  
Lote 102B, Miraflores/Alges  
1495 Lisbon, Portugal  
Tel: (351) (1) 4103420. TLX: (832) 15515  
FAX: (351) 1-410-1844

**Philips Portuguesa, S.A.R.L.,**  
**Divisao de Sistemas Industriais**  
(For Philips products)  
e Electrici-Acastic  
Oturila-Cavinaxille  
2795 Linda-A-Velha  
Tel: 2190071; TLX: 42987

**Saudi Arabia**  
**Electronic Equipment Marketing Co.**  
(For Fluke products)  
P.O. Box 3750  
Riyadh, 11481 Saudi Arabia  
Tel: (928) (1) 477-1650. TLX: 401120

**Singapore, Republic of**  
**Rank O'Connor's (PTE) Ltd.**  
(For Fluke products)  
O'Connor House  
98 Pasir Panjang Road  
Singapore 0511  
Republic of Singapore  
Tel: (65) 4737944. TLX: (786) RS21023

**Philips Project Development (S) Pte. Ltd.**  
(For Philips products)  
Lorong 1, Toa Payoh  
Singapore 1231, P.O. Box 340  
Toa Payoh Central Post Office  
Singapore 9131  
Tel: 65-3502000  
TLX: Philips RS/21375

**South Africa**  
**Protea, PNI**  
(For Fluke products)  
P.O. Box 39127  
Bramley 2018  
Republic of South Africa  
Tel: (27) (11) 786-3647  
TLX: (960) 4-24409 SA  
FAX: 27-11-887-1479

**South African Philips (Pty) Ltd.**  
(For Philips products)  
P.O.B. 7703  
2 Herb Street  
New Doornfontein  
Johannesburg 2000  
Tel: (011) 6179111

**South Korea**  
**Philips Industries (Korea) Ltd.**  
(For Philips products)  
C.P.O. Box 3680, Philips House  
260-199, Itaewon-Dong  
Yongsan-Ku  
Seoul  
Tel: 82-2-794-5011/5  
TLX: Philkor K 27291

**Spain**  
**ESSA**  
(For Fluke products)  
Equipos y Sistemas S.A.  
C/Apolonio Morales, 13-B  
Madrid 16, Spain  
Tel: (34) (1) 458-0150. TLX: (831) 42856  
FAX: (34) 1-458-0150

**Philips Iberica S.A.E. Dpto**  
(For Philips products)  
Aparatos de Medida  
Martinez Villergas 2  
Madrid 28027  
Tel: 404-2200

**Sri Lanka**  
**Computerlink Data Systems, Ltd.**  
(For Fluke products)  
331 Union Place  
Colombo, 2, Sri Lanka  
Tel: (94) (1) 28641/2. TLX: (954) 22455



**Sweden**

**Philips Foersaeljning AB**  
Division Industrialelektronik  
Test & Measurement  
S-115 84 Stockholm  
Tel: (08) 782 18 00

**Switzerland**

**Traco Electronic AG**  
(For Fluke products)  
Jenatschstrasse 1  
8002 Zurich  
Switzerland  
Tel: (41) (1) 201-0711, TLX: (845) 815570

**Philips AG**

(For Philips products)  
Test-und Messtechnik  
Postfach  
CH-8027 Zurich  
Tel: (01) 4882390

**Syria**

**Mabek (Electronics Division)**  
(For Fluke products)  
P.O. Box 4238  
Damascus, Syria

**Philips Moyen-Orient S.A.R.L.**

(For Philips products)  
Rue Fardoss 79  
P.O. Box 2442  
Damascus  
Tel: 218605/221650  
TLX: PHISYR 411203 SY

**Taiwan**

**Schmidt Electronics Corp.**  
(For Fluke products)  
5th Floor, Cathay Min-Sheng  
Commercial Building,  
344 Min-Sheng East Road  
Taipei 104, Taiwan R.O.C.  
Tel: (886) (2) 501-3468, TLX: (785) 11111  
FAX: (886) 2-5029692

**Philips Taiwan Ltd.**

(For Philips products)  
150, Tun Hua North Road  
P.O. Box 22978  
Taipei  
Tel: 886-2-7120500  
TLX: 21570 PHILPEI

**Tanzania**

**Philips (Tanzania) Ltd.**  
(For Philips products)  
T.D.F.L. Building - 1st Floor  
P.O. Box 20104  
Ohio/Upanga Rd.  
Dar es Salaam  
Tel: 29571/4  
TLX: 41016

**Thailand**

**Measuretronix Ltd.**  
(For Fluke products)  
2102/63 Ramkhamhaeng Road  
Bangkok 10240  
Thailand  
Tel: (66) (2) 374-2516, TLX: (788) 82796

**Philips Electrical Co. of Thailand Ltd.**

(For Philips products)  
283, Silom Road  
P.O. Box 961  
Bangkok 10500  
Tel: 66-2-233 6330.9  
TLX: 87327 PHILTHA TH

**Tunisia**

**Selep S.A.R.L.**  
(For Fluke products)  
6, Rue de Sparte  
Tunis - 1000 RP  
Tunisia  
Tel: (216) (1) 248093, TLX: (934) 13030

**STIET**

(For Philips products)  
32bis rue Ben Ghedahem  
Tunis  
Tel: 348666, TLX: 14512

**Turkey**

**Erkman Elektronik Aletler**  
(For Fluke products)  
Ticaret Anonim Sirketi  
Necatibey Cad 92/3  
Karakoy, Istanbul, Turkey  
Tel: (90) (1) 1441546, TLX: (821) 24399  
FAX: (90) 1-1497037

**Turk Philips Ticaret A.S.**

(For Philips products)  
Inonu Caddesi 78/80  
P.K. 504  
80074 Beyoglu-Istanbul  
Tel: 90-1-1435910  
TLX: 24192 PHTRTR

**United Arab Emirates**

**Haris Al-Afag, Ltd.**  
(For Fluke products)  
P.O. Box 8141  
Kamal Hamza Bldg  
Traffic Police Rd.  
Dubai, U.A.E.  
Tel: (971) 4-283625, TLX: (958) 48168

**Philips Middle East**

(For Philips products)  
Dubai Intern. Trade Centre,  
11th Floor  
P.O. Box 9269  
Dubai  
Tel: 971-4-377000  
TLX: 46350 PMOA EM

**Al-Sanani Cen. Trad. Est.**

(For Fluke products)  
P.O. Box 7187  
Abu-Dhabi, U.A.E.  
Tel: (971) (2) 821370  
TLX: (958) 23966

**Uruguay**

**Coasin Uruguay S.A.**  
(For Fluke products)  
Libertad 2529  
Casilla de Correo 1400  
Montevideo, Uruguay  
Tel: (598) (2) 789015, TLX: (398) UY23010

**Industrias Philips del Uruguay S.A.**

(For Philips products)  
Av. Uruguay 1287  
Casilla de Correo 294  
Montevideo  
Tel: 919000  
TLX: PHILURU UY 22296

**Venezuela**

**Coasin C.A.**  
(For Fluke products)  
Calle 9 Con Calle 4, Edif Edinurbi  
Apartado de Correos NR-70.136  
Los Ruices  
Caracas 1070-A, Venezuela  
Tel: (58) 2-241-0309, TLX: (395) 21027

**Inds. Venezolanas Philips. S.A.**

(For Philips products)  
Av. Francisco de Miranda,  
Urb. La Carlota,  
Edif. Centro Empresarial Parque del Este  
Apartado 1167  
Caracas 1010-A  
Tel: 58-2-203,71111  
TLX: 25267 IVPSA VC

**Zaire**

**Philips Electronics S.A.R.L.**  
(For Philips products)  
137, Boulevard du 30 juin  
B.P. 16636  
Kinshasa  
Tel: 31693, TLX: 21078 KINSHASA

**Zambia**

**Philips Electrical Zambia Ltd.**  
(For Philips products)  
Mwembeshi Road  
P.O. Box 1878  
Lusaka  
Tel: 218511/218701  
TLX: ZA 41220

**Zimbabwe**

**Philips Electrical (Pvt.) Ltd.**  
(For Fluke products)  
62 Mutare Road  
P.O. Box 994  
Harare  
Tel: 47211/48031  
TLX: 2236

**For countries not listed above:****Philips Export B.V.****I&E Export****Test & Measuring****Building HVW-3****P.O. Box 218****5600 MD Eindhoven****The Netherlands****Tel: +31 40 324842****TLX: 35000 phic nl****FAX: +31 40 324898**

# TECHNICAL SERVICE CENTERS

## U.S. Service Locations

### California

Fluke Technical Center  
2020 N. Lincoln Street  
Burbank, CA 91504  
(213) 849-4641

Fluke Technical Center  
2300 Walsh Ave., Bldg. K  
Santa Clara, CA 95051  
(408) 727-8121

### Colorado

Fluke Technical Center  
14180 East Evans Ave.  
Aurora, CO 80014  
(303) 695-1000

### Florida

Fluke Technical Center  
940 N. Fern Creek Avenue  
Orlando, FL 32803  
(305) 896-4881

### Illinois

Fluke Technical Center  
1150 W. Euclid Ave.  
Palatine, IL 60067  
(312) 705-0500

### Maryland

Fluke Technical Center  
5640 Fishers Lane  
Rockville, MD 20852  
(301) 770-1576

### New Jersey

Fluke Technical Center  
West 75 Century Road  
P.O. Box 930  
Paramus, NJ 07653-0930  
(201) 262-9550

### Texas

Fluke Technical Center  
1801 Royal Lane, Suite 307  
Dallas, TX 75229  
(214) 869-0311

### Washington

Fluke Technical Center  
6920 Seaway Blvd.  
Everett, WA 98206  
(206) 356-5560

## International

### Argentina

Coasin S.A.  
(For Fluke products)  
Virrey del Pino 4071  
Buenos Aires, Argentina  
Tel: 522-5248

Philips Argentina S.A.  
(For Philips products)  
Casilla Correo 3479  
1000 Buenos Aires  
Tel: 542-2411/51

### Australia

Elmeasco Instruments Pty Ltd.  
(For Fluke products)  
P.O. Box 30  
Concord, N.S.W. 2137  
Australia  
Tel: 736-2888

Elmeasco Instruments Pty. Ltd.  
(For Fluke products)  
P.O. Box 623  
Ringwood, VIC 3134  
Australia  
Tel: 879-2322

Elmeasco Instruments Pty. Ltd.  
(For Fluke products)  
PO Box 274  
Salisbury, Queensland 4107  
Australia  
Tel: 875-1444

Philips Scientific &  
Industrial Equip. Div.  
(For Philips products)  
CentreCourt 25-27 Paul St  
North Ryde  
Sydney N.S.W. 2113  
Tel: 88 88 222

### Austria

Walter Rekirsch Elektronische  
Geräte GmbH & Co.  
(For Fluke products)  
Vertrieb KG  
Obachgasse 28  
1220 Vienna, Austria  
Tel: 253626

Oesterreichische Philips  
Industrie GmbH  
(For Philips products)  
Abteilung Industrie Elektronik  
Triesterstrasse 64  
A-1100 Wien  
Tel: 645521

### Algeria

Bureau de Liaison Philips  
(For Philips products)  
24 bis rue Bougainville  
TI Mouradia, Alger  
Tel: 56 56 72

### Antillen

Philips Antillana N.V.  
(For Philips products)  
P.O. Box 523  
Willemstad, Curacao  
Tel: 414071/74

### Bangladesh

Philips Bangla Desh Ltd.  
(For Philips products)  
P.O. Box 62  
Ramna, Dhaka  
Tel: 234280

## Belgium

N.V. Philips & Mble Assoc  
Scientific & Industrial Div  
70 Rue des Deux Gares  
Brussels, Belgium  
Tel: 2-525 6111

## Brazil

Hi-Tek Electronica Ltda.  
(For Fluke products)  
Al. Amazonas 422  
Alphaville, Barueri  
CEP 06400 Sao Paulo, Brazil  
Tel: 421-5477

Industrias Brasileiras  
Philips Ltd.  
(For Philips products)  
Av. Eng. Luiz Carlos Berrini  
3009-7 and CEP 04571  
Sao Paulo S.P.  
Tel: 241.1611

## Canada

Fluke Electronics Canada Inc.  
400 Britannia Rd  
Unit #1  
Mississauga, Ontario L4Z 1Y9  
Tel: 416-890-7600

Fluke Electronics Canada Inc.  
(For Fluke products)  
1255 Trans Canada Highway  
Suite 130  
Dorval, Quebec H9P 2V4  
Tel: 514-685-0022

Fluke Electronics Canada Inc.  
(For Fluke products)  
101, 1144 29th Ave. N.E.  
Calgary, Alberta T2E 7P7  
(403) 291-5215

## Chile

Intronica Chile Ltda.  
(For Fluke products)  
Casilla 16228  
Santiago 9, Chile  
Tel: 2321886

Philips Chilena S.A.  
(For Philips products)  
Casilla Postal 2687  
Santiago de Chile  
Tel: 770038

## China, Peoples Republic of

Instrimpex - Fluke Service Center  
(For Fluke products)  
57, Xisi Dong Da Jie  
Xicheng-qu  
P.O. Box 9085  
Beijing  
People's Republic of China  
Tel: 65-7281

## Colombia

Sistemas E Instrumentacion, Ltda  
(For Fluke products)  
Carrera 13, No. 37-43, Of. 401  
Ap. Aereo 29583  
Bogota DE, Colombia  
Tel: 232-4532

## Denmark

Tage Olson A/S  
(For Fluke products)  
Ballerup, Byveg 222  
2750 Ballerup  
Denmark  
Tel: 658111

Philips Elektronik Systemer A/S  
(For Philips products)  
Ald Industri & Forskning  
Prags Boulevard 80-P.B. 1919  
DK-2300-Koebenhavn S  
Tel: 572222

## Ecuador

Proteco Coasin Cia. Ltda.  
(For Fluke products)  
P.O. Box 228-A  
Ave. 12 de Octubre 2285 y  
Orellana  
Quito, Ecuador  
Tel: 526759

Philips Ecuador S.A.  
(For Philips products)  
Casilla 343  
Quito  
Tel: 396100

## Egypt and Sudan

Electronic Engineering  
Liaison Office  
(For Fluke products)  
P.O. Box 2891 Horreya  
11361 Heliopolis  
Cairo, Egypt  
Tel: 695705

Philips Egypt Branch  
of P.M.O.B.V.  
P.O. Box 1687  
10 Abadel Rahman el Rater St  
Dokki, Cairo  
Tel: 490922

## Ethiopia

Philips Ethiopia  
(Priv. Ltd. Co.)  
(For Philips products)  
Ras Aveve Areguay Avenue  
P.O. Box 2565  
Addis Ababa  
Tel: 148300

## Finland

Instrumentarium Elektronikka  
(For Fluke products)  
P.O. Box 64, Vitikka 1  
02631 ESPOO 63  
Finland  
Tel: 358-0-5281

OY Philips AB  
(For Philips products)  
Kaivokatu 8  
P.O. Box 255  
00101 Helsinki 10  
Tel: 1-7271

## France

M.B. Electronique S.A.  
(For Fluke products)  
606, Rue Fourny  
P.O. Box 31  
78530 BUC, France  
Tel: 9568131

SA Philips Industrie  
et Commerciale  
Science et Industry  
(For Philips products)  
105 Rue de Paris  
93002 Bobigny  
Tel: 48301111

**Norway**

Morgenstjerne & Co. A/S  
(For Fluke products)  
Konghellegate 3  
P.O. Box 6688, Rodelokka  
Oslo 5, Norway  
Tel: 356110

Norsk Akieselskap  
Philips Dept.  
Industry and  
Telecommunication  
Sandstuveien 70  
P.O. Box 1  
Manglerud  
Oslo 6  
Tel: 2-680200

**Pakistan**

Pak International Operations  
(For Fluke products)  
505 Muhammadi House  
I.I. Chundrigar Road  
P.O. Box 5323  
Karachi Pakistan  
Tel: 221127/239052

Philips Electrical Industries  
of Pakistan Ltd.  
(For Philips products)  
Philips Markaz  
M.A. Jinnah Road  
P.O. Box 7101  
Karachi 3, Pakistan  
Tel: 725772/9

**Paraguay**

Philips del Paraguay S.A.  
(For Philips products)  
Av. Artigas 1497  
Casilla Correo 605  
Asuncion  
Tel 291924

**Peru**

Importaciones Y Representaciones  
Electronicas S.A.  
(For Philips products)  
Avda. Franklin D. Roosevelt 105  
Lima 1, Peru  
Tel: 288650

Philips Peruana S.A.  
(For Philips products)  
Av. Alfonso Ugarte 1268  
Apartado 1841  
Lima  
Tel: 32-6070

**Philippines**

Spark Radio and Electronics Corp.  
(For Fluke products)  
Greenhills P.O. Box 610  
San Juan Metro-Manila Zip, 3113  
Philippines  
Tel: 63-2-775192

Philips Industrial Development Inc.  
(For Philips products)  
2246 Pasong Tamo  
Makati, Metro Manila  
Tel: 868951

**Portugal**

Decada Espectral  
(For Fluke products)  
Equipamentos de Electronica e  
Cientificos, SARL  
Av. Bombeiros Voluntarios,  
Lote 102B  
Miraflores/Alges  
1495 Lisboa, Portugal  
Tel: 2103420

Philips Portuguesa S.A.R.L.  
(For Philips products)  
Av. Eng. Duarte Pacheco  
Appartado 1331  
Lisbon-1  
Tel: (019) 683121

**Singapore**

Rank O'Connor's Singapore  
(PTE) Ltd.  
(For Fluke products)  
98 Pasir Panjang Road  
Singapore 0511  
Republic of Singapore  
Tel: 4737944

Philips Project Development  
(S) Pte. Ltd.  
(For Philips products)  
Lorong 1  
Toa Payoh  
P.O. Box 340  
Singapore 1231  
Tel: 2538811

**South Africa**

Fluke S.A. (Pty) Ltd.  
P.O. Box 39127  
Bramley 2018  
Republic of South Africa  
Tel: 786-3647

South African Philips  
(Pty) Ltd.  
(For Philips products)  
P.O.B. 7703  
2, Herb Street  
New Doornfontein, Johannesburg  
2000  
Tel: 786-3647

**Spain**

Equipos Y Sistemas S.A. (ESSA)  
(For Fluke products)  
C/Apolonio Morales, 13B  
Madrid 16, Spain  
Tel: 4580150

Philips Iberica S.A.E.  
(For Philips products)  
Dpto Aparatos de Medida  
Marinez Villergas Z Madrid 28027  
Tel: 404-2200

**Sweden**

Svenska A.B. Philips  
Div. Industrialelektronik  
Avd. Matinstrument  
11584 Stockholm  
Tel: 782-1800

**Switzerland**

Traco Electronic AG  
(For Philips products)  
Jenatschstrasse 1  
8002 Zurich  
Switzerland  
Tel: 2010711

Philips AG  
(For Philips products)  
S & I Equipment  
Allmendstasse 140  
Postfach 670  
CH-8027 Zurich, Switzerland  
Tel: 488221

**Syria**

Philips Moyen-Orient S.A.  
(For Philips products)  
Rue Fardoss 79  
B.P. 2442 Damascus  
Tel 221650

**Taiwan**

Schmidt Electronics Corp.  
(For Fluke products)  
5th Floor, Cathay Min-Sheng  
Commercial Building  
344 Min-Sheng East Road  
Taipei, Taiwan, R.O.C.  
Tel: 5013468

Yung Kang Trading Co. Ltd.  
(For Philips products)  
11th Floor CTS Building  
102 Kuang Fu South Road  
P.O. Box 1467  
Taipei  
Tel: 752-7421

**Tanzania**

Philips (Tanzania) Ltd.  
(For Philips products)  
P.O. Box 20104  
Dar es Salaam  
Tel: 29571

**Thailand**

Measuretronix Ltd.  
(For Fluke products)  
2102/63 Ramkamhaeng Rd.  
Bangkok, 10240 Thailand  
Tel: 3742516

Philips Electrical Company  
of Thailand Ltd.  
(For Philips products)  
Electronic and Communication  
Systems Dept.  
283 Silom Road  
P.O. Box 961  
Bangkok 10  
Tel: 233-63330/9

**Tunisia**

S.T.I.E.T.  
(For Philips products)  
32 bis  
Rue Ben Ghedhahem  
Tunis  
Tel: 244268

**Turkey**

Erkman Elektronik Aletler  
(For Fluke products)  
Ticaret Anonim Sirketi  
Necatibey Cad 92/3  
Karakoy, Istanbul, Turkey  
Tel: 441546

Turk Philips Ticaret A.S.  
(For Philips products)  
Posta Kutusu 504  
Beykoglu Istanbul  
Tel: 1435910

**United Arab Emirates**

Philips Middle East b.v.  
(For Philips products)  
Dubai Int'l Trade Centre  
Level 11  
P.O. Box 6269  
Dubai  
Tel: 377000

**Uruguay**

Coasin Uruguaya S.A.  
(For Fluke products)  
Casilla de Correo 1400  
Libertad 2529  
Montevideo, Uruguay  
Tel: 789015

Industrias Philips del Uruguay  
(For Philips products)  
Avda Uruguay 1287  
Casilla de Correo 294  
Montevideo  
Tel: 915641

**Venezuela**

Coasin C.A.  
(For Fluke products)  
Calle 9 Con Calle 4  
Edif. Edinurbi  
Apartado de Correos Nr-70 136  
Los Ruices  
Caracas 1070-A, Venezuela  
Tel: 241-0309

Industias Venezolanas  
Philips S.A.  
(For Philips products)  
Av Ppal de los Ruices  
Apartado Postal 1167  
Caracas  
Tel: 239-3811

**Zaire**

S.A.M.E. s.z.r.l.  
(For Philips products)  
B.P. 16636  
Kinshasa  
Tel: 31693

**Zambia**

Philips Electrica Zambia Ltd  
(For Philips products)  
Mwembeshi Road  
P.O. Box 31878  
Lusaka  
Tel: 218511

**Zimbabwe**

Philips Electric (Pvt) Ltd.  
(For Philips products)  
P.O. Box 994  
62 Umtali Road  
Beverley, Harare  
Tel: 47211

**Germany (F.R.G.)**

Philips GmbH  
Unternehmensbereich Elektronik  
für Wissenschaft und Industrie  
Werk für Messtechnik  
Oskar-Messner-Straße 18  
8045 Ismaning  
Deutschland  
Tel: (089) 96050

**Great Britain**

Philips Scientific Test  
& Measuring Division  
(For Fluke products)  
Colonial Way  
Watford Herts WD2 4TT  
United Kingdom  
Tel: 0923-240511

Pye Unicam Ltd.  
(For Philips products)  
York Street  
Cambridge CB1 2PX  
Tel: 923-40511

**Greece**

Hellenic Scientific  
Representations Ltd.  
(For Fluke products)  
11 Vrassida Street  
Athens 612, Greece  
Tel: 7211140

Philips S.A. Hellenique  
(For Philips products)  
P.O. Box 153  
54 Ave Syngrou  
Athens  
Tel: 9215311

**Hong Kong**

Schmidt & Co (H.K.) Ltd.  
(For Fluke products)  
18th Fl., Great Eagle Centre  
23 Harbour Road  
Wanchai, Hong Kong  
Tel: 8330-222

Philips Hong Kong Ltd.  
(For Philips products)  
P.O.B. 2108  
27-29 Floor  
Hopewill Centre  
17, Kennedy Road  
Hong Kong  
Tel: 5-283298

**Iceland**

Heimelistaeki SF  
(For Philips products)  
Saetun 8  
Reykjavik  
Tel: 24000

**India**

Hinditron Services Pvt. Ltd.  
(For Fluke products)  
1st Floor, 17-B, Mahal  
Industrial Estate  
Mahakali Road Andheri East  
Bombay 400 093, India  
Tel: 6300043

Hinditron Services Pvt. Ltd.  
(For Fluke products)  
33/44A Raj Maha Villas Extn.  
8th Main Road  
Bangalore 560 080, India  
Tel: 363139

Hinditron Services Pvt. Ltd.  
(For Fluke products)  
15 Community Centre  
Panchshila Park  
New Delhi, 110 017, India  
Tel: 6433675

Hinditron Services Pvt. Ltd.  
Field Service Center  
(For Fluke products)  
Emerald Complex 1-7-264  
5th Floor  
114 Sarojini Devi Road  
Secunderabad 500 003, India  
Tel: 821117

Peico Electronic &  
Electricals Ltd.  
(For Philips products)  
Shivsagar Estate  
Block "A"  
Dr. Annie Besant Road  
P.O.B. 6598  
Worli, Bombay 400 018  
Tel: 4921500

**Indonesia**

P.T. Lamda Triguna  
(For Fluke products)  
P.O. Box 6/JATJG  
Jakarta 13001, Indonesia  
Tel: 8195365

P.T. Daeng Brothers  
(For Philips products)  
Centre Point Bldg - 3rd Floor  
Jl Jend. Gatot Suggroto  
Kav. 35/36  
P.O. Box 41 Tebet  
Jakarta 12950  
Tel: 517335

**Iran**

Philips Iran Ltd.  
(For Philips products)  
P.O.B. 1297  
Teheran  
Tel: 372081/5

**Iraq**

Philips Iraq W.L.L.  
(For Philips products)  
Munir Abbas Building  
4th Floor South Gate  
P.O. Box 5749  
Baghdad  
Tel: 880409

**Ireland**

Philips Electrical  
(Ireland) Ltd.  
(For Philips products)  
Newstead  
Clonskeagh, Dublin 14  
Tel: 693355

**Israel**

R.D.T. Electronics  
Engineering Ltd.  
P.O. Box 43137  
Tel Aviv 61430  
Israel  
Tel: 483211

**Italy**

Sistrel S.p.A.  
(For Fluke products)  
Via Pelizza da Volpedo 59  
20092 Cinisello Balsamo  
Milan, Italy  
Tel: 6181893

Philips S.p.A.  
(For Philips products)  
Sezione S & I T & M Dept.  
Viale Elvezia 2  
20052 Monza  
Tel: (039) 3635.1

**Japan**

John Fluke Mfg. Co., Inc.  
Japan Branch  
(For Fluke products)  
Sumitomo Higashi Shinbashi Bldg.  
1-1-11 Hamamatsucho  
Minato-ku, Tokyo 105, Japan  
Tel: 434-0181

Nihon Philips Corporation  
(For Philips products)  
Shuwa Shinagawa Building  
26-38 Takanawa 3-chrome  
Minato-ku, Tokyo 108  
Tel: 4485511

**Kenya**

Philips (Kenya) Ltd.  
(For Philips products)  
P.O. Box 30554  
Nairobi  
Tel: 557999

**Korea**

Myoung Corporation  
(For Fluke products)  
Yeo Eui Do P.O. Box 14  
Seoul, Korea  
Tel: 784-9942

Philips Elelectronics  
(Korea) Ltd.  
(For Philips products)  
C.P.O. Box 3680  
Seoul, Korea  
Tel: 794-5011/5

**Lebanon**

Philips Middle East S.A.R.L.  
(For Philips products)  
P.O. Box 11-670  
Beirut  
Tel: 285748/9

**Malaysia**

Mecomb Malaysia Sdn. Bhd.  
(For Philips products)  
P.O. Box 24  
46700 Petaling Jaya  
Selangor, Malaysia  
Tel: 774-3422

Electronic System (Malaysia)  
Sdn. Bhd.  
(For Philips products)  
Resource Plaza  
No. 4 Persiaran Barat  
P.O. Box 12163  
Petaling Jaya  
Selangor, Kuala Lumpur  
Tel 554511/24

**Mexico**

Mexicana de Electronica  
Industrial,  
S.A. (Mexel)  
(For Fluke products)  
Diagonal No. 27  
Entre Calle de Eugenia Y Ave  
Colonia del Valle  
C.P. 03100, Mexico  
Tel: 660-4323

Apesa Electronica S.A. de C.V.  
(For Philips products)  
Apartado Postal 213  
C.P. 50140  
Toluca Edo de Mexico

**Morocco**

S.A.M.T.E.L.  
(For Philips products)  
2 Rue de Bapaume  
Casablanca  
Tel: 243050

**Netherlands**

Philips Nederland  
Test & Meetapparaten  
(For Fluke products)  
Hoefseweg 55A,  
5017 AD Tilburg  
Postbus 115, 5000 AC Tilburg  
Nederland  
35 24 55

Philips Nederland B.V.  
(For Philips products)  
Boschdijk 525  
Gebouw VB  
5600 MD Eindhoven  
Tel: 782808

**New Zealand**

Northrop Instruments  
& Systems Ltd.  
(For Fluke products)  
459 Kyber Pass Road,  
Private Bag, Newmarket  
Auckland 1, New Zealand  
Tel: 501-801

Northrop Instruments  
& Systems Ltd.  
(For Fluke products)  
First Floor, Northrop Bldg.  
189-191 Willis Street  
P.O. Box 2406  
Wellington, New Zealand  
Tel: 856-658

Philips Electrical Ind. Ltd.  
(For Philips products)  
Scientific & Industrial Div  
68-86 Jervois Quay  
P.O. Box 2097  
Wellington C1  
Tel: 735735

**Nigeria**

Associated Electronic Products  
(Nigeria) Ltd.  
(For Philips products)  
Km. 16 Ikorodu Road  
Ojota  
P.O. Box 1921  
Lagos  
Tel: 932825